


## Texas Boom Company Specifications – Standard Type I Turbidity Curtain



Standard Type I Turbidity Curtain
<b>Diagram Illustrative Only – Not to Scale</b>
<b>Free board:</b> 6 inches or greater
<b>Draft:</b> 36 – 240 inches
<b>Section length:</b> 100 feet
<b>Segment per 100' section:</b> 26
<b>Fabric:</b> 18 Oz per Sq Yd Vinyl Coated Polyester PVC
<b>Color:</b> International Orange
<b>Floatation logs:</b> Rolled closed cell polyethylene foam
<b>Top tension member:</b> none
<b>Ballast and bottom tension:</b> 1/4" HDG steel chain – connected end to end with shackle
<b>End connectors:</b> Reinforced seams with grommets
<b>Water holes:</b> 26
<b>Anchor points:</b> 3
<b>Section length options:</b> 50 ft / 100 ft

Boom Configuration
<b>A:</b> Top Tension Pocket
<b>B:</b> One inch RF welds
<b>C:</b> Foam Log
<b>D:</b> Anchor Point
<b>E:</b> N/A
<b>F:</b> Grommets
<b>G:</b> Ballast Chain
<b>H:</b> Chain Pocket
<b>I:</b> Air and water drainage hole

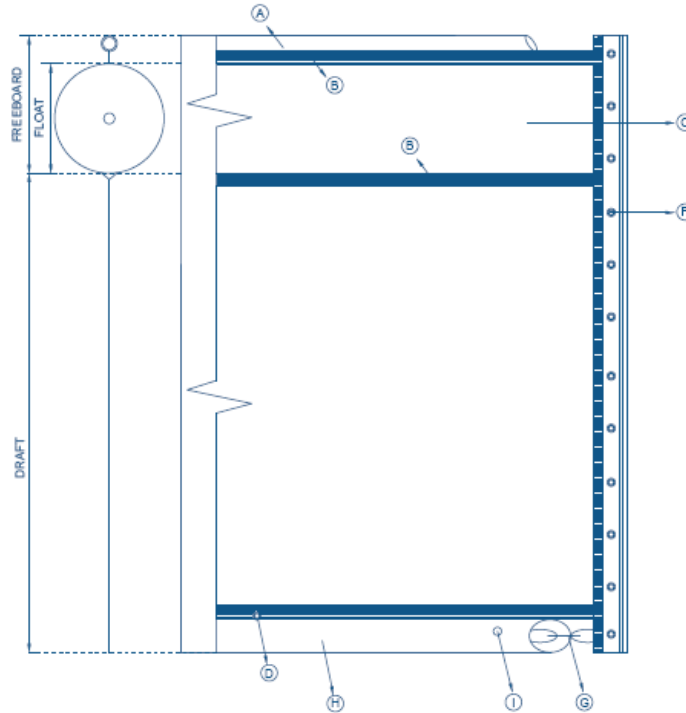

**Texas Boom Company**  
 16600 Park Row Drive  
 Houston, TX 77084  
 (281) 441-2002  
[sales@texasboom.com](mailto:sales@texasboom.com)